



**Package Contents**

- Handset
- Power Adapter
- Quick Installation
- User Guide on CD-ROM

**Wireless-G**  
IP Phone

Quick Installation



# 1 Inserting the Battery

To insert the battery, follow these instructions:

- A** Remove the cover of the battery compartment. Push down on the button and slide the cover downward.
- B** Insert the battery. Make sure the metal contacts of the battery line up with the metal contacts of the battery compartment.
- C** Insert the door and slide it upward until it snaps into place.



# 2 Powering on the IP Phone

Make sure you have the account information, including necessary IP Phone settings, supplied by your Internet phone service provider.

If you already have an account set up with your Internet phone service provider, then proceed to step A. If you do not have an account, then go to the website of your Internet phone service provider and sign up for service. Proceed to step A.

- A** Plug the USB mini-B connector of the included power adapter into the USB mini-B port of the IP Phone. Then connect the power adapter to a standard electrical outlet.
- B** The power LED will flash, alternating between blue and purple.

**NOTE:** For the initial charge, allow the battery to charge for at least 10 hours.



# 3 Setting Up the IP Phone

Before you begin, make sure your network has an active Internet connection.

- A** Press the **Power** button for two seconds.
- B** The IP Phone will scan for wireless networks and then display a list of networks.

**NOTE:** The following are descriptions of your navigation choices:

- **Navigation Pad** - Scroll through menu choices
- **Center Selection Key** - Make selections or save changes
- **Clear Soft Key** - Use for a backspace
- **Exit Soft Key** - Cancel changes and return to the previous screen

Scroll through the list, and press the center selection key to select a network.

If the network you want is not shown, select **Rescan**.

- C** The IP Phone will automatically connect to the network.

If WEP security is enabled, select the appropriate transmit key from the Key Index, and then enter the network's WEP key. Press the center selection key.




If WPA security is enabled, then enter the network's WPA key. Press the center selection key.

- D** You will be notified when the IP Phone has connected to the network, and a checkmark will appear next to the name of the network.

Select **Exit**.

- E** The standby screen will appear. Select **Menu**.

- F** Phone Settings will be highlighted. Navigate the menu choices, and then select **SIP Settings**.

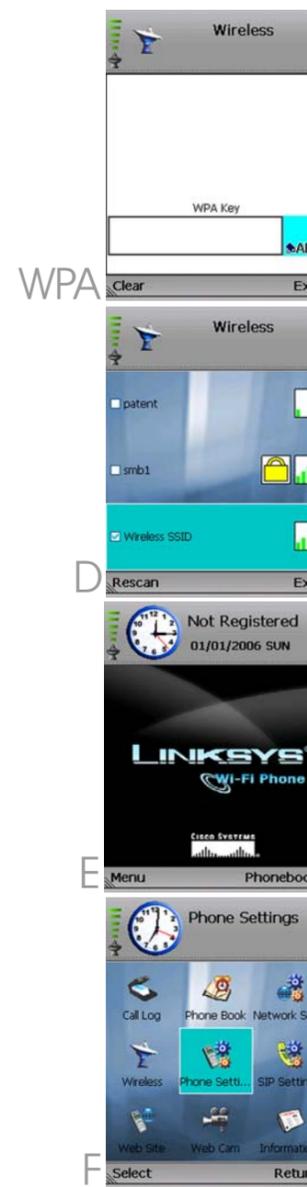

# 4 Using the IP Phone

G

A list of SIP settings will be displayed. You will enter the settings your Internet phone service provider has given you. (If you do not have these settings, contact your provider.)



G

For the Proxy IP setting, select **Edit**.

H

Enter the Proxy IP address, and press the center selection key.



H

Scroll down to Proxy Port, and select **Edit**.

J

Enter the Proxy Port number, and press the center selection key.



J

Scroll down to Register Proxy IP, and select **Edit**.

L

Enter the Register Proxy IP address, and press the center selection key.



L

M

Scroll down to Register Proxy Port, and select **Edit**.

N

Enter the Register Proxy Port number, and press the center selection key.

O

Scroll down to Outbound Proxy IP, and select **Edit**.

P

Enter the Outbound Proxy IP address, and press the center selection key.

Q

Scroll down to Outbound Proxy Port, and select **Edit**.

R

Enter the Outbound Proxy Port number, and press the center selection key.

S

If your Internet phone service provider did not provide an Expire Time setting, then keep the default, **3600** seconds, and proceed to step U.

T

If your Internet phone service provider provided an Expire Time setting, then scroll down to Expire Time, and select **Edit**.

T

Enter the Expire Time, and press the center selection key.



N



P



Q



T

U

Scroll down to Phone Number, and select **Edit**.

V

Enter the Phone Number you will use for Internet phone calls, and press the center selection key.

W

Scroll down to User Name, and select **Edit**.

X

Enter the User Name, and press the center selection key.

Y

Scroll down to Password, and select **Edit**.

Z

Enter the Password, and press the center selection key.

AA

On the *SIP Settings* screen, select **Return**.

AB

On the *Phone Settings* screen, select **Return**.

The standby screen will appear and indicate that the IP Phone is ready for phone calls.

**Congratulations! The installation of the Wireless-G IP Phone is complete.**



V



X



Z



AA

A

To make a call, enter the phone number you want to call.

B

Press the **Call** button.

C

When you are on a phone call, select **Option** to see a list of menu choices.

D

Select **HangUp** to end the call.



C

To change the volume, use the + and - buttons on the side panel of the IP Phone.



## Options

When you are on a call, you have several options available. Press the left soft key to make a selection, and press the right soft key to return to the previous menu. Use the navigation pad to scroll through these menu choices:

- HangUp
- Mute
- Hold
- Transfer
- Blind TFR (Transfer)
- Conference

For details about these options and other settings, refer to the User Guide on the CD-ROM.

For instructions on how to check your voicemail, contact your Internet phone service provider.



**LINKSYS**  
A Division of Cisco Systems, Inc.

For additional information or troubleshooting help, refer to the User Guide on the Setup CD-ROM. You can also call or e-mail for further support.

**24-hour Technical Support**  
800-326-7114  
(toll-free from US or Canada)

**E-mail Support**  
support@linksys.com

**Website**  
<http://www.linksys.com> or  
<http://support.linksys.com>

**RMA (Return Merchandise Authorization)**  
<http://www.linksys.com/support>

**FTP Site**  
<ftp://ftp.linksys.com>

**Sales Information**  
800-546-5797 (800-LINKSYS)

Linksys is a registered trademark or trademark of Cisco Systems, Inc. and/or its affiliates in the U.S. and certain other countries. Copyright © 2006 Cisco Systems, Inc. All rights reserved.

WIP330\_V1.1-QI-60123NC JL