

INNOMEDIA MTA 6328Re

MULTIMEDIA TERMINAL ADAPTERS

NEXT GENERATION VoIP CPE DEVICES FOR BROADBAND SERVICE PROVIDERS

The MTA 6328Re represents InnoMedia's next generation of VOIP multimedia terminal adapters. Expanding on the original 3328Re technology, the new 6328Re has been redesigned to offer increased performance resulting in wirespeed throughput.

KEY BENEFITS

Ideal for deploying to consumer and SOHO broadband customers

Flexible system interoperability and platform support protects your network investment

Easy to install and auto-provision

QoS features provide PSTN-like voice quality service

CLASS features support with call agents or softswitches

NAT & DHCP server functionalities ideal for home networks

Wire speed router throughput: 100 Mbps



Standalone
MTA 6328Re
with 2 voice
ports

The standalone MTA 6328Re with 2 voice ports is an ideal solution for broadband service providers looking to deploy new revenue-generating telephony services to their customers. Compatible with any standard analog telephone set, the MTA 6328Re delivers voice quality and features equivalent or superior to those of PSTN. Its versatile and open system interfaces provide the flexibility to work with many different networks (HFC cable, ADSL, fiber, wireless) and broadband access devices. The MTA 6328Re allows users to share their broadband connection throughout their home network by either connecting a PC or a hub into the MTA downlink port. Its data rate limiting feature ensures voice quality during phone calls by automatically throttling down data throughput and reserving bandwidth for voice whenever a call is in progress. It is highly interoperable and can be used with SIP-based Softswitches or MGCP/NCS Call Agents. For remote provisioning, monitoring and testing, the MTA 6328Re supports HTTP, SNMP, TFTP, FTP, and Telnet.

The MTA 6328Re supports TCP/IP and allows for VPN connections with PPTP and IPSec pass-through capabilities. This feature is ideal for individuals who telecommute from home or small offices that need to create a single VPN connection to remote networks. NAT capabilities provide simultaneous Internet access for multiple PCs (see Figure 1). The built-in DHCP server automatically assigns IP addresses to devices on the network. The web-based interface allows configuration of the MTA 6328Re to handle IP routing and port forwarding for various services, such as FTP and Telnet, and other applications, such as gaming and remote PC access.



MTA INTERFACES

- A. Power
- B. RJ-45 port (uplink to broadband access device)
- C. RJ-45 (downlink to PC)
- D. RJ-11 port (connect to phone)

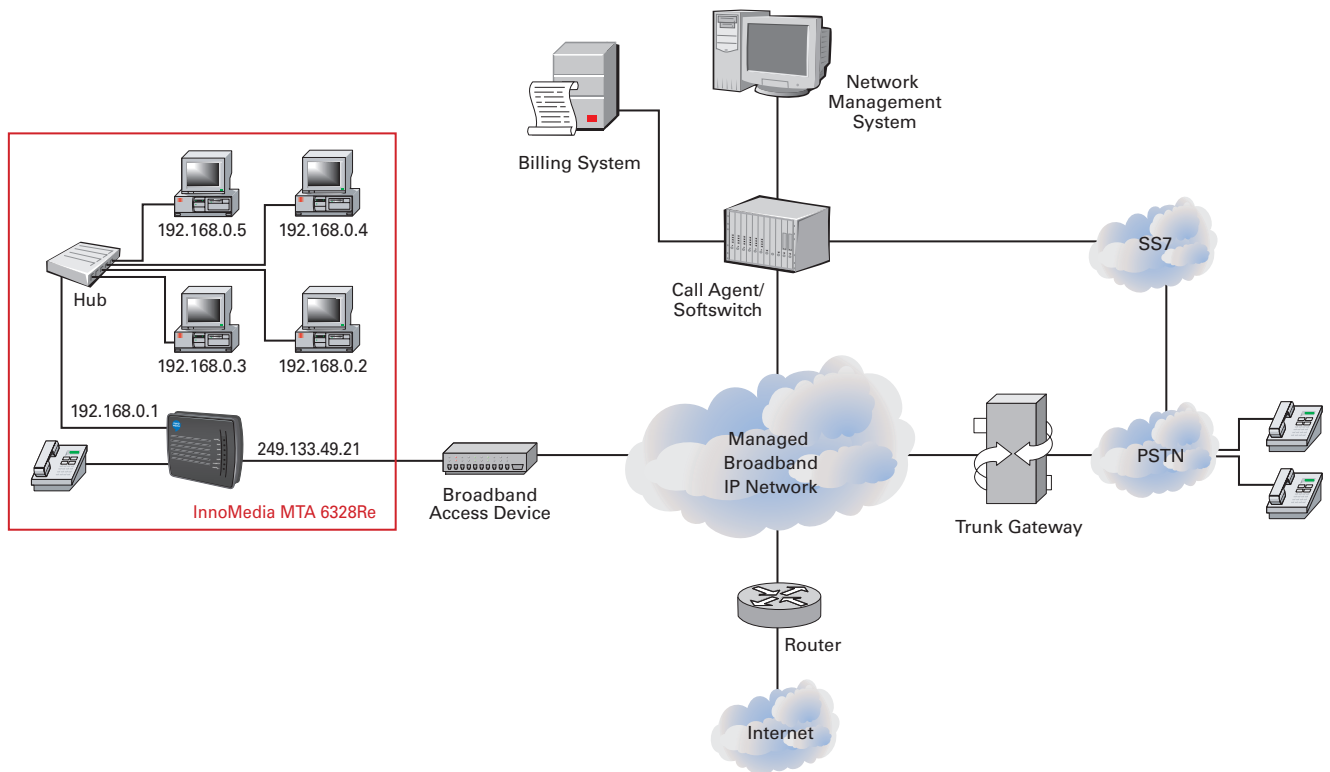
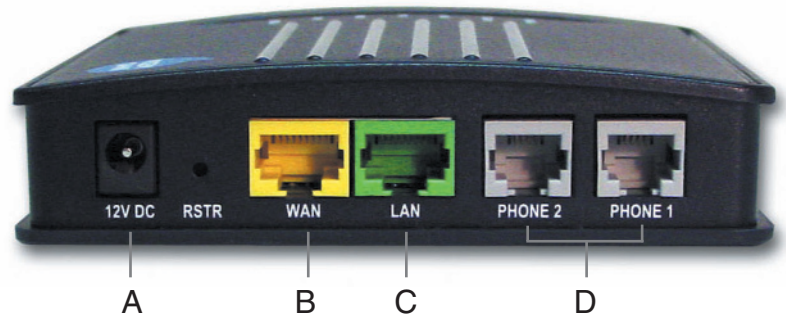


Figure 1- Typical Applications For MTA 6328Re

SPECIFICATIONS

Product Specification

Category	Specification
Telephone Interface	2 FXS voice ports
Network Interface	10/100 Base-T RJ-45 Uplink and Downlink ports
Accessory	Ethernet Cable, AC/DC Power Adapter

Software Specification

Category	Specification
Protocols	SIP 2.0, MGCP 1.0, NCS 1.0
Speech Codec Capabilities	G.711 and one of the following: G.726 G.728; G.729E (High quality high complexity codecs) G.723.1; G.729A (Low bit rate codecs) Supports 3-way conferencing with compression
Quality of Service	IEEE 802.1p/q; IP TOS Tagging; Built-in Priority Switch; Data Bandwidth Control; Adaptive jitter buffer
Signal Processing	Echo cancellation: G.168 T.38 Fax (or fall-back to G.711) Caller ID FSK signal regeneration Line reversal/Polarity reversal 16 Khz metering pulse (MGCP only)
Certification	FCC part 15B; CE; UL
Tones	Ring back tone Busy tone Reorder tone Dial tone Off hook warning tone Message waiting tone (MWI)/Stutter tone Call waiting tone
DTMF Tone	DTMF tone detection and generation/RFC2833
Announcements	Play out any voice stream sent by Call Agent or SIP Proxy controlled announcement server Device IP announcement
OAM&P	Access components implemented: CLI, TFTP, HTTP 1.0, SNMP, Telnet, DHCP or DNS, HTTPS (available soon) Works with any SNMP (v.1, v.2c, v.3)-based EMS Offers web-based access as well as TFTP-based remote software downloads/upgrades Provisionable set feature codes
Features	Built-in DHCP server NAT capabilities for simultaneous Internet access for multiple PC's IP routing and port forwarding MAC cloning IP/Domain filtering STUN NAT traversal

Physical Specification

Category	Specification
Power Consumption	Idle: 12V/0.19A (2.28W) / Talking: 12V/0.28A (3.36W)
Power Supply	Output: DC 12V, 1A / Input: AC 120V, 60Hz, 200mA
Dimensions	1.18 in (H) x 4.60 in (W) x 5.12 in (D) / 30 mm (H) x 117 mm (W) x 130 mm (D)
Operating Temperature	32°F to 122°F (0°C to 50°C)
Storage Temperature	-4°F to 158°F (-20°C to 70°C)
Operating Humidity	10 to 90% RH
Storage Humidity	5 to 95% RH



www.innomedia.com

InnoMedia Pte Ltd.

10 Science Park Road #03-04
The Alpha, Singapore Science Park II, SINGAPORE 117684
Ph: (65) 6872 0828; Fax: (65) 6872 0900

InnoMedia Technology Inc.

3F, No. 3, Industrial East Road IX
Hsinchu Science-Based Industrial Park, Hsinchu TAIWAN 300
Ph: (886) 3 564 1299; Fax: (886) 3 564 1589

InnoMedia, Inc.

128 Baytech Drive
San Jose, CA 95134 USA
Ph: (408) 432-5400; Fax: (408) 432-5404

InnoMedia, Inc.

Room 1405, Prime Tower, #22 Chaowai Street
Chaoyang District, Beijing 100020 CHINA
Ph: (86) 10 6588 5141; Fax: (86) 10 6588 5140

